

## Screened Bifold Door Specifications


### Flat Screen

- Suitable for tall openings – up to 2700mm high
- Suitable for wide openings – up to 3000mm wide single span (2400mm high), 5900 wide double span
- max panel weight 40 kgs
- max panel width 1000mm

### Pleated Screen

- Suitable for tall openings – up to 2400 mm high
- Suitable for wide openings – up to 4560mm wide single span (2400mm high), 8 metre wide double span
- max panel weight 75 kgs
- max panel width 1000mm

### Available Hardware

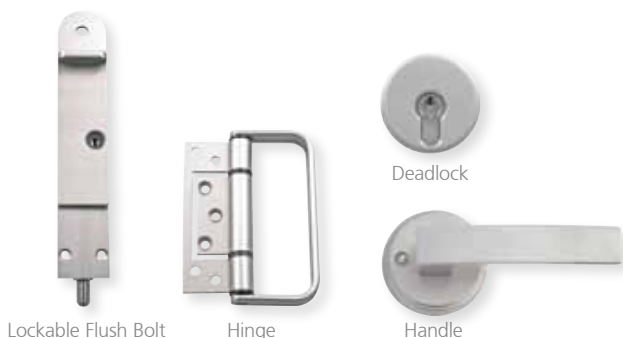

## Flat Screen Details Only


SCREENED BIFOLD DOOR	
max panel weight	40 kgs
max panel width	1000mm
MAX FRAME SIZES - FLAT SCREEN ONLY	
double screen	2400mm(H) x 5900mm(W)
	2700mm(H) x 4800mm(W)
single screen	2400mm(H) x 3000mm(W)
	2700mm(H) x 2400mm(W)

### How to Order


When ordering please specify both sizes a) Overall Frame Width (measured from outer metal housing to outer metal housing) and b) Jamb Width (measured from outer jamb to outer jamb). Speak to your builder or call Southern Star for more advice and installation details. Important note: Do not allow any fixings to penetrate the screen housing or the screen will be damaged.

### Detail for 'Flat' Screen Bifold Door


For Retractable Pleated Screen Bifold Door refer to standard Bifold Door Installation Instructions.

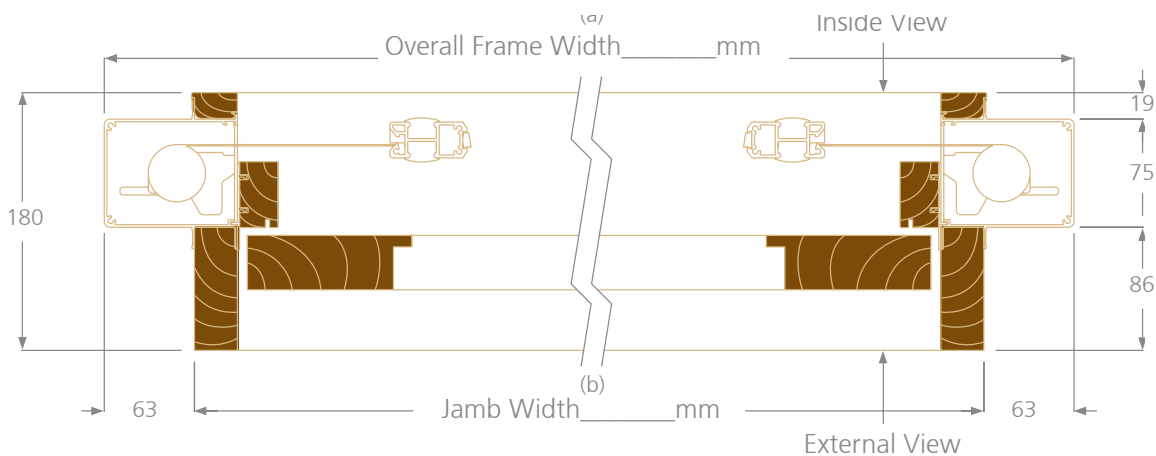

### Existing Construction Installation – Brick veneer

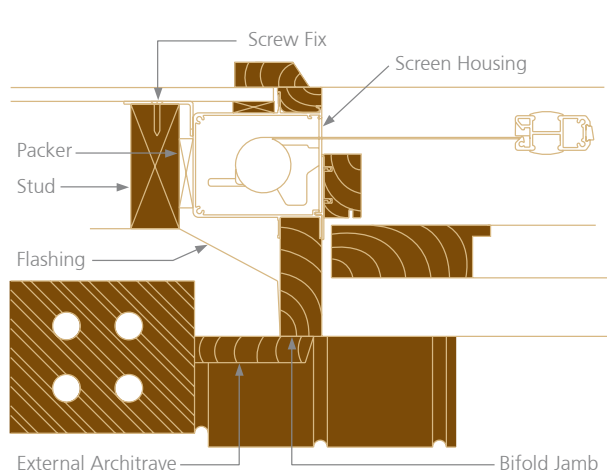

### New Construction Installation – Brick veneer

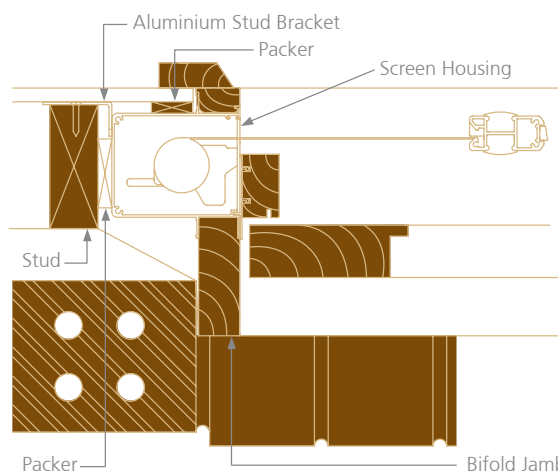

Our commitment to continual product development necessitates that sizes and specifications may change without notice.